

Traditional
styling with the
endurance
of steel




Decra[®]
CORONA SHAKE

THE NATURAL LOOK OF TIMBER WITH ENDURING STEEL

Decra is a totally new style in roofing. It has been designed to recreate natural cedar wood shingles, or shakes, that are commonly used on many roofs throughout North America. At the same time Decra avoids the natural drawbacks of using timber as a roof decking. In variable climates wooden shakes are prone to warping and splitting, and can create a fire hazard in dry conditions.

Using advanced metal-pressing technology AHI Roofing has developed a new roofing system that re-creates the deep grain profile of cedar wood shakes. The result is the natural look of a timber roof with the low maintenance that you would expect from lightweight steel roofing.

THE INNER STRENGTH OF STEEL

The heart of each individual Decra panel is *ZINCALUME steel. This durable core is coated with an acrylic resin, followed by an acrylic base coat into which natural stone chips are embedded. Finally an acrylic overglaze is applied to provide a finishing seal on the top side. The underneath of the panel is also coated with acrylic resin to provide additional protection.

*ZINCALUME is a registered trademark of Bluescope Steel Ltd.

THE ADVANTAGES OF LIGHTWEIGHT DECRA

SAFETY

A Decra roof weighs about one sixth of the weight of a concrete tile roof of the same area. The average concrete roof weighs seven tons and the house requires additional design construction to carry that load. This is an important consideration in earthquake prone environments.

STRENGTH

Each Decra panel interlocks with the surrounding panels and is fixed to the roof with a unique horizontal fixing system. The fasteners are at right angles to wind uplift forces creating a roofing structure of superior strength.

COST EFFICIENT

Considerable savings can be achieved in structural cost in the design of houses built to the lightweight building codes.

EASE OF HANDLING


Decra is lightweight and easy to handle. This reduces installation time and provides further cost savings.



DISCOVER THE ADVANTAGES OF OUR TECHNOLOGY

ROOFING PANEL FROM AHI ROOFING

Coatings even and smooth when panel coated after pressing

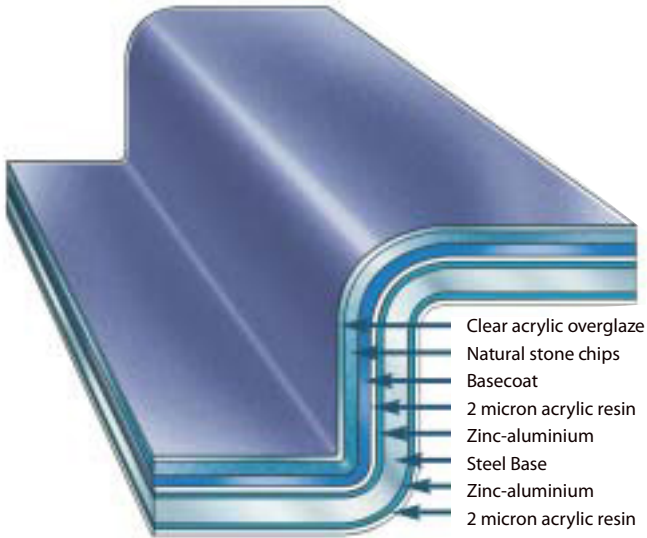

FULLY TESTED

Decra has been fully appraised and has received test reports from the following authorities. Test report copies are available from any of our offices or representatives.

WEATHERING RESISTANCE

- Accelerated Weathering Test to American Society for Testing and Materials standard (ASTM) G26.

WEATHERING SECURITY

- High Speed Dynamic Rain Penetration and High Wind Loading Tests - by Construction Research Laboratory Inc, Florida, USA.
- Low Speed Dynamic Penetration Test - by the Experimental Building Station, Australia

HURRICANE/CYCLONE WIND RESISTANCE

- Hurricane test by Construction Research Laboratory Inc, Miami, Florida, USA
- Cyclone Loading Test to the wind Loading Code, Australian Standard 1170, Part 2 2002 - by Cyclone Testing Station, Australia.

CORROSION RESISTANCE

- Salt/fog test to ASTM B117
- 100% Relative Humidity Test to ASTM D2247

CONCENTRATED LOADING

- Concentrated Force on Roofing Tiles to Australian Standard 1582. Rule 5.2, 1973 by Cyclone Testing Station, Australia


FIRE RESISTANCE

- Class A&B under UL790 (ASTM E-108) when applied in accordance with instructions.

RESISTANCE TO THE IMPACT OF HAILSTONES

- Hailstone test by Commonwealth Scientific and Industrial Research Organisation, Division of Building, Construction and Engineering, Australia.

ESTIMATED LIFE OF GALVANISED AND ZINCALUME® STEEL

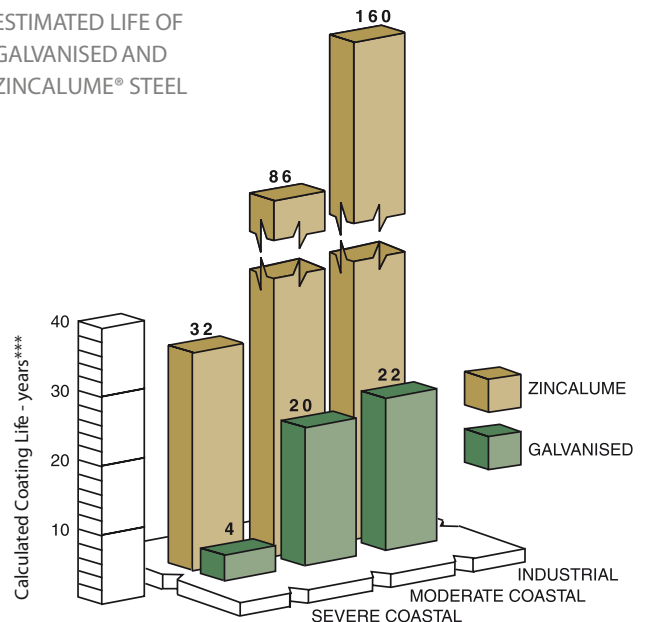


Figures quoted by BHP in BIEC Clips 48, 8/97 for uncoated Zincalume

TECHNICAL INFORMATION


Pitch: The interlocking Decra design will allow any pitch from 15° up.

Rafters: Cost savings can be achieved if rafter lengths are designed to accommodate an exact number of Decra courses. Where this is not possible it may be necessary to trim the top course of panels. Rafters or roof trusses can be set at various centres depending on the type of construction.

BATTEN SPACING

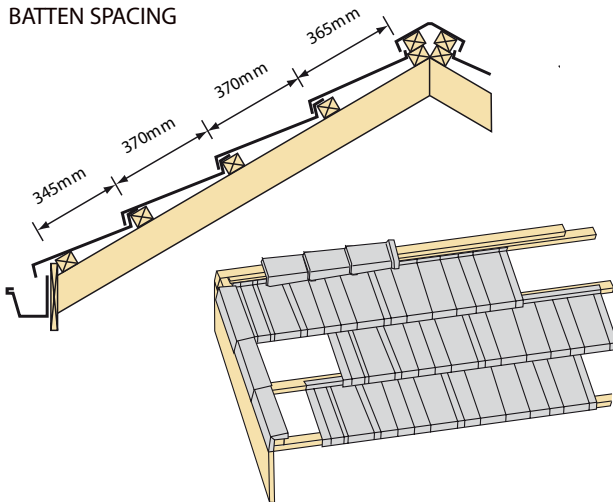

NOMINAL BATTEN SIZES	
Rafters or Truss Centres	Batten Size (Nominal)
Recommended up to: 900mm	50 x 40mm
Optional 1200mm	50 x 50mm
1500mm	60 x 65mm on edge
1800mm	50 x 75mm on edge

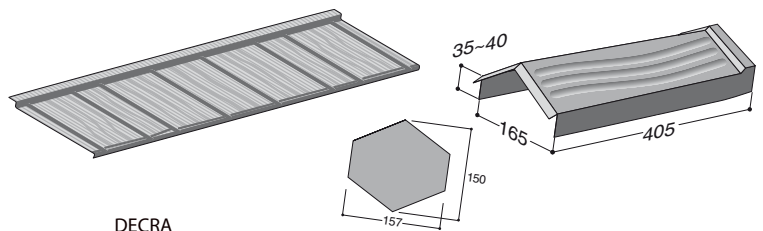

DECRA

Width of cover	370mm
Length of cover	1250mm
Overall length	1310mm
Upstand	27mm
Coverage	2.2 shake/m ²
Weight/panel	3.0kg
Weight/m ²	6.6kg

ANGLETRIM

Standard Angle Trims must be used on rakes, hips and ridges.

Overall length	405mm
Length of cover	370mm
Weight/unit	0.5kg

Layout: The accompanying detail shows the typical random layout pattern of the Decra system.

This random laying pattern is necessary to recreate the look of natural timber shakes and is an essential requirement for Decra fitting.

Manufactured to International Standards.
more than 150 countries around the world.

AHI Roofing is registered to ISO 9001 which recognises the quality management systems standards now accepted in

AHI Roofing Limited
90-104 Felton Mathew Avenue,
Glen Innes,
PO. Box 18071, Glen Innes,
Auckland,
New Zealand.
Tel: (64) 9 978 9010
Fax: (64) 9 978 9069
Email: export@ahiroofing.co.nz

Asia Regional Office
Lot 12, Nilai Industrial Estate, 71800 Nilai,
Negeri Sembilan,
Malaysia.
Tel: (60) 6 799 1877
Fax: (60) 6 799 1827
Email: info@ahiroofing.co.my

Japan Regional Office
6F Pinex Kojimachi,
4-4-3 Kojimachi, Chiyoda-ku,
Tokyo 102-0083,
Japan.
Tel: (81) 3 3264 8701
Fax: (81) 3 3264 8726
Email: info@ahiroofing.jp

Middle East Regional Office
Emirates Towers, Level 41,
Sheikh Zayed Road.
PO. Box 31303, Dubai,
United Arab Emirates.
Tel: (971) 4 319 7685
Fax: (971) 4 319 7687
Email: ahiroof@emirates.net.ae

Africa Regional Office
AHI Roofing
11 Station Road, Toddington,
Bedfordshire,
LU5 6BN
Tel: (44) 0 1525 634255
Fax: (44) 0 1525 634266
Email: ahi.roof@ntlworld.com

China Regional Office
702-5 Yen Sheng Centre
No. 64 Hoi Yuen Road,
Kwun Tong Kowloon
Hong Kong
Tel: (852) 2960 7725
Fax: (852) 3126 2965
info@ahiroofing.com.cn



www.ahiroofing.com

