



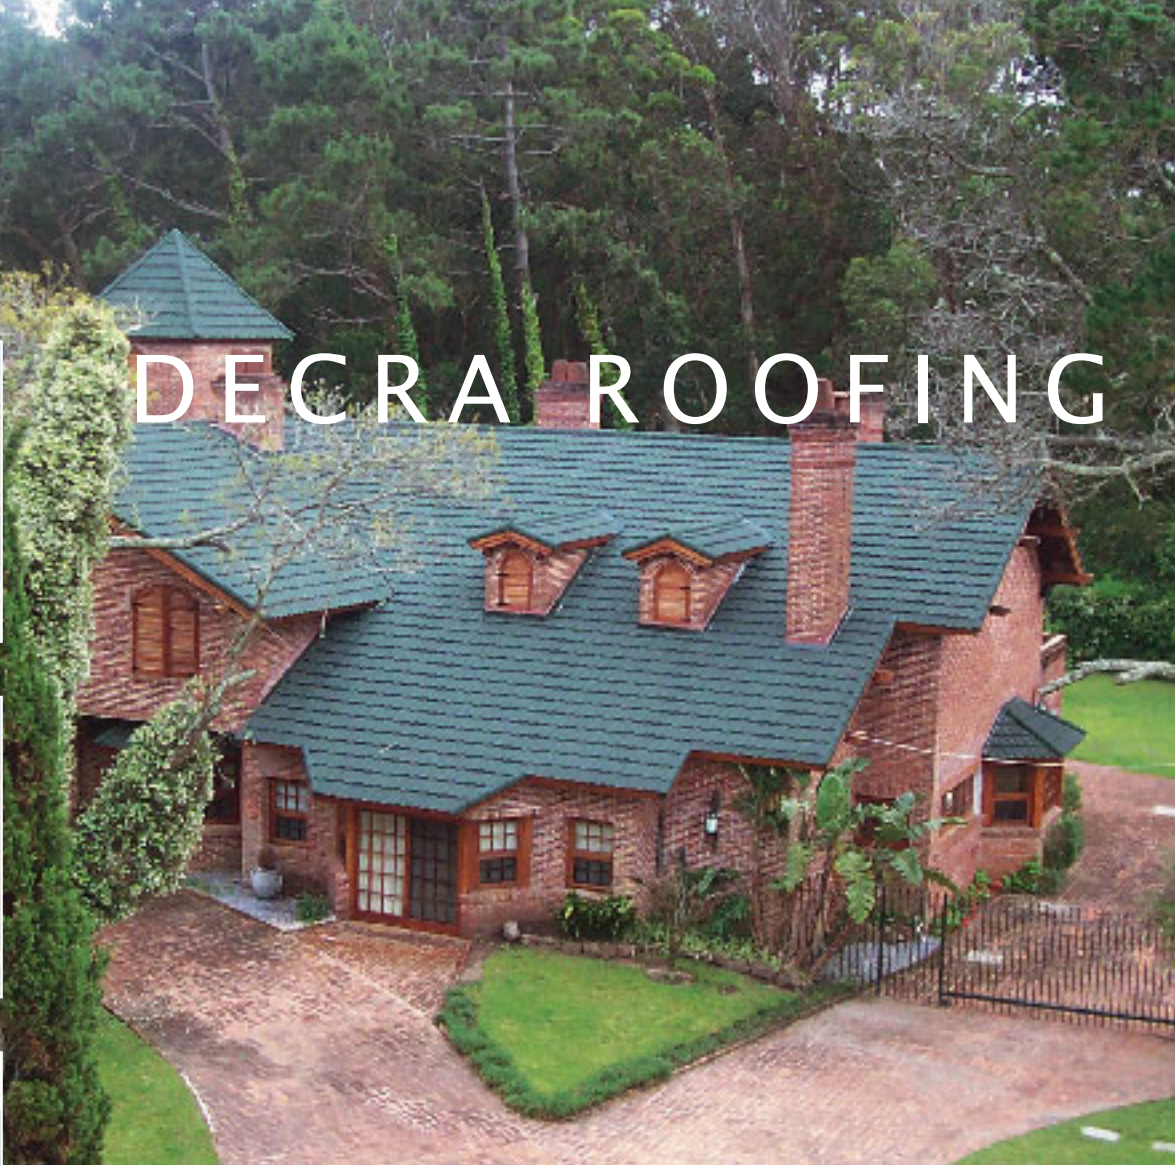

PROVEN AROUND
THE WORLD


Decra[®]
ROOFING TILES

DECRA ROOFING



Decra Sage, Punta Del Este, Uruguay

ADVANCED ROOFING SYSTEM


More than 30 years of research and development has gone into Decra Tiles. At its heart is the Decra roofing panel, pressure formed from 0.4mm steel; seven tile impressions are formed horizontally in one panel. Each panel is profiled to form an extremely strong overlapping and interlocking structure.

LIGHT AND STRONG

It is the interlocking structure and unique horizontal fastening method which has enabled Decra Tiles to survive some of the world's worst weather conditions and perform excellently against fire, hurricanes and even earthquakes. And yet, at only 7 kilograms per square metre, roofs made from Decra Tiles are amongst the lightest roofs available.

RIGHT COLOUR, RIGHT DESIGN

Available in ten natural colours to blend harmoniously with the tones of nature and to complement both traditional and modern designs. And with two roofline finishes to choose from, Decra Tiles gives today's architects, specifiers and engineers precisely what they want...distinction, versatility and quality.

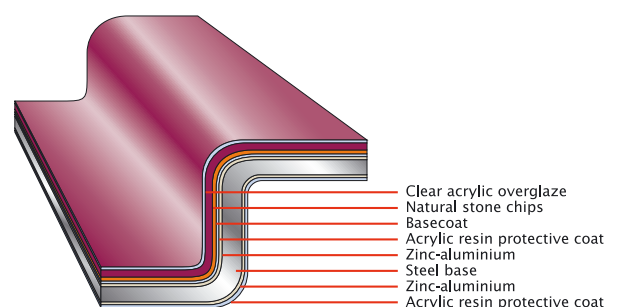

TILES



Decra Textured Charcoal, New Zealand




APPROVED TO WORLD STANDARDS

Decra Tiles' remarkable resilience is due to the combination of the weathering qualities of stone and the strength of steel. It is this resilience that has enabled Decra Tiles to meet the requirements of the most stringent laboratory tests and meet the toughest building codes and standards worldwide. (see back page).

CHOOSE THE CORROSION RESISTANCE OF ZINCALUME®* COATED STEEL

Zincalume® coated steel has superior long term corrosion resistance. The combination of the sacrificial protection of zinc with the barrier protection of the aluminium provides superior performance to that of galvanised coatings in almost all environments. This all adds up to a significantly longer life.

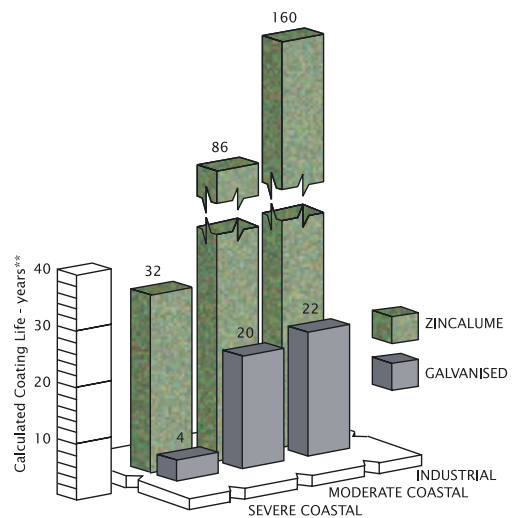


**quoted by BHP in BIEC clips issue 48, 8/97 for uncoated Zincalume®).

*Zincalume® is a registered trademark of Bluescope Steel Limited.

TECHNICAL INFORMATION


MAJOR COMPONENTS*

TILE

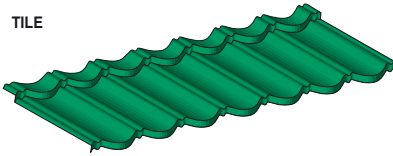


Overall length 1320mm
 Length of cover 1260mm
 Width of cover 370mm
 Upstand 25mm
 Roof cover/tile 0.46m²
 Coverage 2.2 tiles/m²
 Weight/unit 2.9kg
 Weight/m² 6.4kg


BARREL



Overall length 405mm
 Length of cover 370mm
 Weight/Decra unit 0.5g
 BARREL END DISC
 Diameter 150mm
 Weight/Decra unit 0.1g




SIDE FLASHING




Overall length 2000mm
 Length of cover 1900mm
 Weight/unit 1.4kg

BOX BARGE



Overall length 2000mm
 Length of cover 1900mm
 Weight/Decra unit 2.5kg

RIDGE HIP



Overall length 2000mm
 Length of cover 1900mm
 Weight/Decra unit 2.0kg

All dimensions and weights given are nominal

* A range of other accessories is available to suit particular construction requirements.

Decra Tiles have been fully appraised and received appraisal certificates from the following. Test report copies are available from any of our offices or representatives.

WEATHERING RESISTANCE

- Accelerated Weathering Test to American Society for Testing and Materials standard (ASTM) G26.

WEATHERING SECURITY

- High Speed Dynamic Rain Penetration and High Wind Loading Tests - by Construction Research Laboratory Inc, Florida, USA.
- Low Speed Dynamic Rain Penetration Test - by the Experimental Building Station, Australia

HURRICANE/CYCLONE WIND RESISTANCE

- Hurricane test by Construction Research Laboratory Inc, Miami, Florida, USA.
- Cyclone Loading Test to the Wind Loading Code, Australian Standard 1170, Part 2 1975 - by Cyclone Testing Station, Australia.

CORROSION RESISTANCE

- Salt/fog Test to ASTM B117
- 100% Relative Humidity Test to ASTM D2247

CONCENTRATED LOADING

- Concentrated Force on Roofing Tiles to Australian Standard 1582. Rule 5.2, 1973 by Cyclone Testing Station, Australia.


FIRE RESISTANCE

- Class A&B under UL790 (ASTM E-108) when applied in accordance with instructions.

RESISTANCE TO THE IMPACT OF HAILSTONES

- Hailstone test by Commonwealth Scientific and Industrial Research Organisation, Division of Building, Construction and Engineering, Australia.

BATTEN SPACING

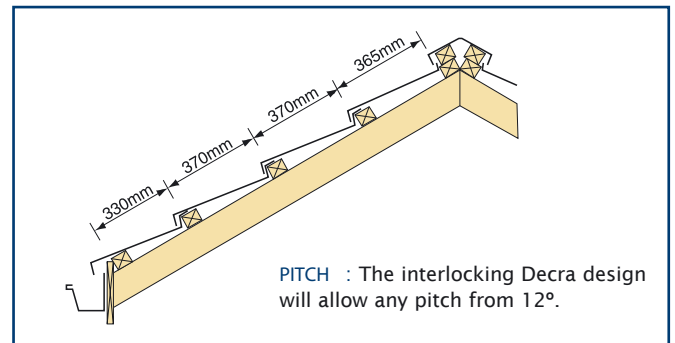

AHI Roofing Limited
 90-104 Felton Mathew Avenue,
 Glen Innes.
 PO Box 18071, Glen Innes,
 Auckland, New Zealand.
 Tel: (64)-9-978 9010
 Fax: (64)-9-978 9069
 export@ahiroofing.co.nz

European Regional Office
 Priestacott Cottage Bradford,
 Holsworthy,
 Devon, EX22 7AN,
 United Kingdom.
 Tel: (44)-1409 281398
 Fax: (44)-1409 281898
 info@ahiroofing.co.uk

Middle East Regional Office
 Emirates Towers, Level 41,
 Sheikh Zayed Road.
 PO. Box 31303, Dubai,
 United Arab Emirates
 Tel: (971)-4-319 7685
 Fax: (971)-4-319 7687
 ahiroof@emirates.net.ae

China Regional Office
 702-5 Yen Sheng Centre
 No. 64 Hoi Yuen Road,
 Kwun Tong Kowloon
 Hong Kong
 Tel: (852)-2960 7725
 Fax: (852)-3126 2965
 info@ahiroofing.com.cn

AHI Roofing (Malaysia) Sdn Bhd
 Lot 12, Nilai Industrial Estate,
 71800 Nilai
 Negeri Sembilan
 Malaysia
 Tel: (60)-6-799 1877
 Fax: (60)-6-799 1827
 info@ahiroofing.com.my

Japan Regional Office
 6F Pinex Kojimachi
 4-4-3 Kojimachi, Chiyoda-ku
 Toyko 102-0083, Japan
 Tel: (81)-3-3264 8701
 Fax: (81)-3-3264 8726
 info@ahiroofing.jp

Africa Regional Office
 11 Station Road, Toddington,
 Bedfordshire LU5 6BN
 Tel: (44)-0-1525 634255
 Fax: (44)-0-1525 634266
 ahi.roof@ntlworld.com



LIFETIME SOLUTIONS

223 - ROOF (7663) www.lifetimesolutionstt.com

Decra
 ROOFING TILES

www.ahiroofing.com

AHI ROOFING

A FLETCHER BUILDING COMPANY

AHI ROOFING IS REGISTERED TO: ISO 9001 QUALITY MANAGEMENT SYSTEM STANDARD.